

GGIV 2000

Single Phase Hybrid Inverter



Pure Sine Wave



Detachable Dust Cover



Lithium Battery Activation




Wide MPPT Range 20-100V



LCD Display

BMS

Support Lithium/Lead-acid Battery

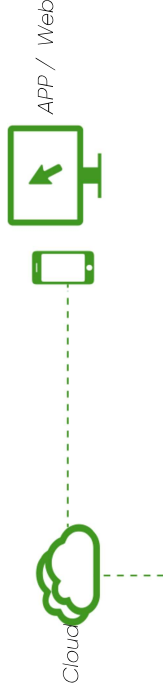

Model

AC Input

Rated Input Voltage (VAC)

Voltage Range (VAC)

Frequency (Hz)

AC Output

Rated Capacity (kVA)

Peak Power (kVA)

Voltage (VAC)

Power Factor (PF)

Frequency

Switch Time (ms)

Wave Form

Overload Capacity (Battery Mode)

Max. Efficiency (Battery Mode)

Parallel Quantity

Charger (PV / AC)

Solar Charger Type

Max PV Input Current / Input Power

MPPT Range@Operating Voltage (VDC)

Max PV Open Circuit Voltage (VDC)

Max PV Charge Current (A)

Max AC Charge Current (A)

Max. Charge Current (PV + AC) (A)

Battery

Rated Voltage (VDC)

Floating Charge Voltage (VDC)

Overcharge Protection (VDC)

Battery Type

Interface