



Off-Grid Solar Inverter

Model: MR-SPF8000 / 11000 TWIN (Version 1)

FEATURES

- Dual outputs, for smart load management
- Maximum PV input current increases to 27A
- Status indication with RGB lights
- Built-in Wi-Fi for mobile monitoring (Android/iOS App available)
- Supports USB On-the-Go function
- Reserved communication port for BMS (RS485, CAN-BUS or RS232)
- Replaceable fan design for ease of maintenance
- Battery independent design
- Selectable high power charging current
- Compatible to Utility Mains or generator input
- Built-in anti-dust kit
- Optional DC output for DC fan, LED bulb and so on (only for 8K model)
- Parallel operation with 6 units

APPLICATION SCENARIOS



Villa



Home




Manor



Small Farm

SOLAR SYSTEM CONNECTION

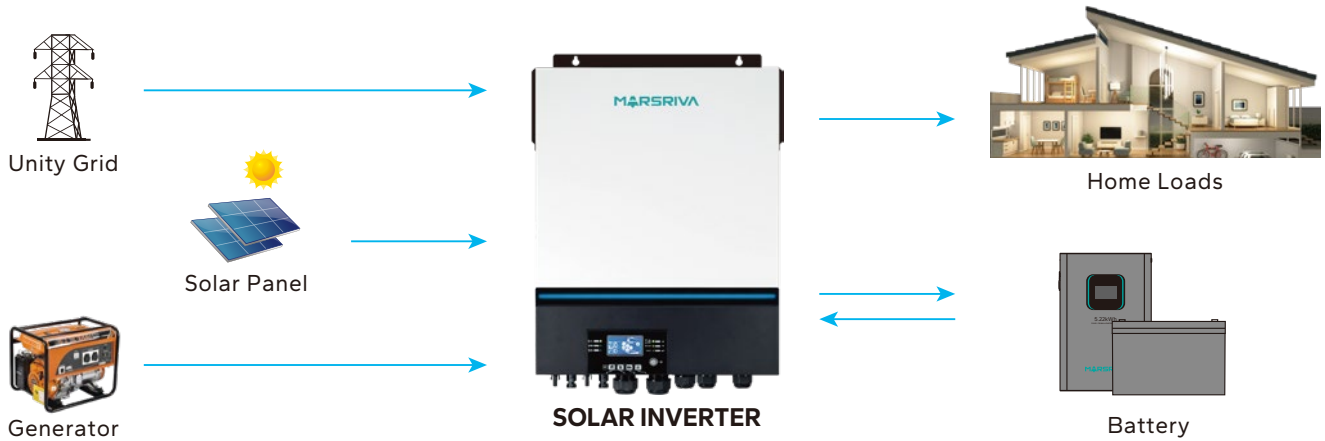

SPECIFICATIONS

MODEL	MR-SPF8000 TWIN (Version 1)	MR-SPF11000 TWIN (Version 1)
RATED POWER	8kVA / 8kW	11kVA / 11kW
PARALLEL CAPABILITY	Yes, 6 units	
INPUT		
Nominal Input Voltage	230VAC	
Input Voltage Range (Selectable)	170 – 280VAC (For PC); 90 – 280VAC (For Home Appliances)	
Nominal Input Frequency	50Hz / 60Hz (Auto sensing)	
OUTPUT		
Output Voltage Regulation	230VAC ± 5%	
Nominal Output Frequency	50Hz / 60Hz	
Waveform	Pure sine wave	
Transfer Time	10ms (For PC); 20ms (For Home Appliances)	
Surge Power	16kVA	22kVA
Peak Efficiency	95% at Line mode, 93% at Inverter mode	
Optional DC Output	12VDC ± 5W, 100W	N/A
BATTERY		
Nominal Battery Voltage	48VDC	48VDC
Floating Charging Voltage	54VDC	54VDC
Overcharge Protection	66VDC	63VDC
AC CHARGING & MPPT SOLAR CHARGING		
AC Charging Algorithm	3 step	
Max. PV Array Power	8kW (4kW*2)	11kW (5.5kW*2)
MPPT Operating Voltage Range	90 – 450VDC	
Max. PV Array Open Circuit Voltage	500VDC	
Max. PV Input Current	27A*2 (MAX. 40A)	
Max. AC Charging Current	120A	150A
Max. Charging Current	120A	150A
PHYSICAL & COMMUNICATION		
Dimension, D x W x H (mm)	147.4 × 432.5 × 553.6	
Net Weight (kg)	18.4	
Communication Interface	USB, RS232, BMS, WiFi, Dry-contact	
ENVIRONMENT		
Humidity	5% – 95% Relative Humidity (Non-condensing)	
Operating Temperature	-10°C to 50°C	
Storage Temperature	-15°C to 60°C	